



GRAFFITI REMOVER Graffiti cleaning gel

PROCESS INTRODUCTION :

Hydro-Mineral GRAFFITI REMOVER is a cleaning gel specifically designed for cleaning graffiti, used inside and outside on most surfaces (wood, concrete, metal, stone) without altering them.

Apply using a roller or brush. Leave the product work until there is a total softening of the coating. Hydro-Mineral GRAFFITI REMOVER does not alter and does not affect the nature of the materials for which it is intended.



SCOPE OF IMPLEMENTATION :




Inside



Outside

Efficient on acrylic paints and varnish, glycerophthalic, vinyl.
Does not contain chlorinated solvents, paraffin, petroleum distillates.
Ideal for vertical surfaces due to its gel texture.

Non-flammable.

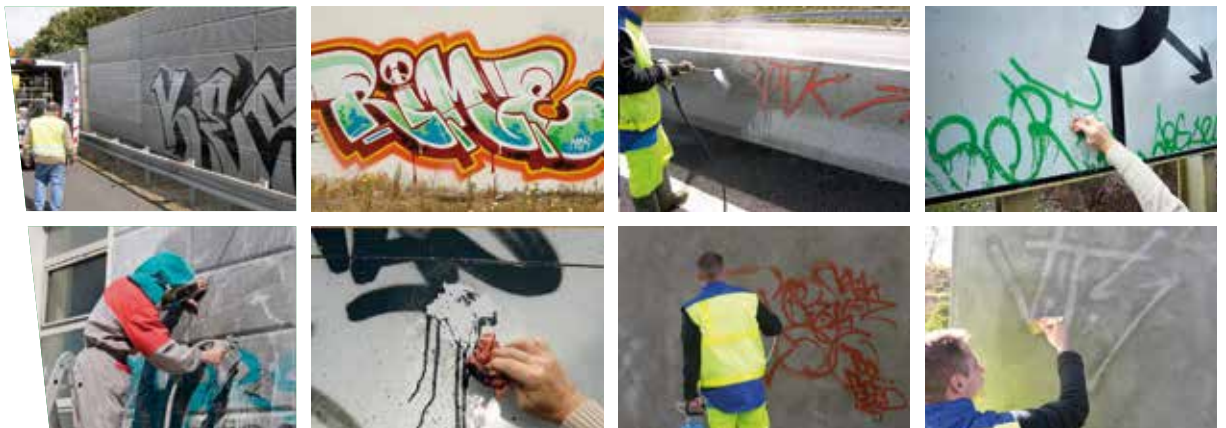

Limitations of use :

It is indispensable to proceed with a preliminary test before any definitive treatment.

For future protection, we recommend the use of our Anti-Graffiti system , made with a layer of a MINERALIZER for fixing and a colourless layer of mineral protection, compatible with the GRAFFITI REMOVER.



PACKAGING : Plastic pots 5 Kg et 1 Kg.

The information contained in this leaflet is intended to help users. It is from the result of tests carried out objectively in our laboratories. It is up to the users of our products to decide if the products are suitable for the job they want to do.
In doing so, Hydro-Mineral do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product.



HYDRO MINERAL

IMPLEMENTATION SHEET

GRAFFITI REMOVER

Graffiti cleaning gel

APPLICATION:



Brush



Roller



Water

Product ready to use: Apply with a roller or a brush. Leave the product work until the total softening of the coating (15 minutes to 2 hours max).

The action time depends on the age, the number of layers and the thickness of the coating.

Brush to remove residues. Wipe and rinse with water.

Due to the wide variety of substrates and materials, we recommend a preliminary test.



AVERAGE CONSUMPTION : 1 Litre = 7 to 10 m² (Depending on the paint.)

CONDITIONS AND PRECAUTIONS OF APPLICATION :

Temperature of application	Min	Max
Air temperature	3°C	30°C

View the implementation video



Scan code

It is essential to proceed with a preliminary test before any definitive treatment.

Hydro-Mineral GRAFFITI REMOVER is ready to use. Do not mix it with another product, do not dilute.

It is essential to protect all the materials which are not to undergo this treatment: Do not apply in frosty weather. Do not apply in direct sunlight.

It is not necessary to apply Hydro-Mineral GRAFFITI REMOVER on the whole surface where it is not subject to graffiti.

EQUIPMENT CLEANING :

Clean the equipment with water.

Recycle or dispose of the packaging in accordance with the legislation in force.

PHYSICAL AND CHEMICAL PROPERTIES :

ASPECT : gel

COLOUR : Colourless

ODOUR : Aromatic

DENSITY : 1.06

PH : 3.5

SOLUBILITY : non-soluble

WITHOUT : Chlorinated Solvent, NMP

DANGER AND SAFETY INFORMATION :

Avoid release to the environment.

Dispose of contents/container in accordance with local regulation.

Skin Contact: Wash the skin with soap and water.

Eye contact: Rinse with water. Get medical attention if pain, blinking, tears or redness persist.

Ingestion: Rinse mouth. Get medical attention if ill effect develops.

In general, in case of doubt or if symptoms persist, always call a doctor.

PERSONAL PROTECTION :



Safety glasses



Glove

The information contained in this leaflet is intended to help users. It is up to the users of our products to decide if the products are suitable for the job they want to do. In doing so, Hydro-Mineral do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product.

Hydro-Mineral International (HMI) : Tél : +33(0)9.87.53.02.60 Mail : hmi@hydro-mineral.net
73000 CHAMBERY-Savoie Mont-Blanc- FRANCE - Siret : 840 843 155 00010 – APE 4675 Z